


P/N: LTD-DA-30-13.8

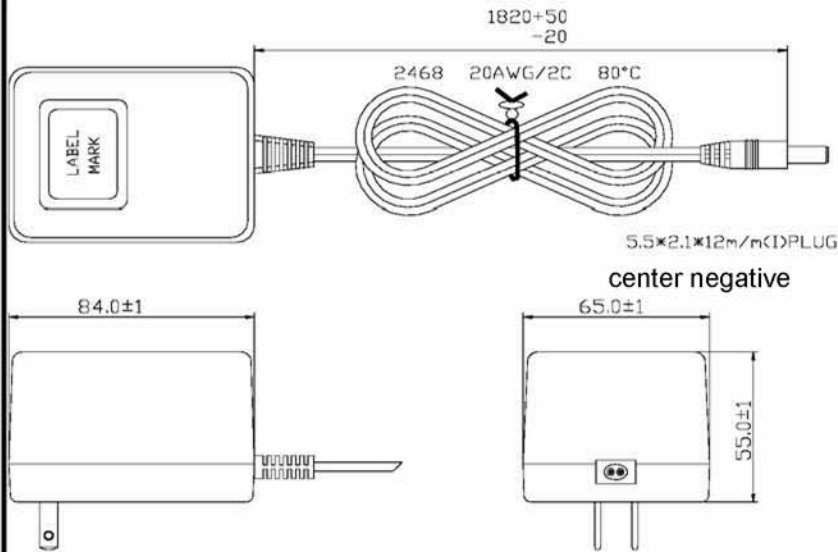

Output Cable: **2468 20AWG/2C 80 °C 1.8M LENGTH**
5.5*2.1*12mm(I) DC PLUG

ELECTRONICAL SPECIFICATION

Input Voltage	120
Frequency (Hz)	60
Power Rated (W)	30
Exciting Current With No load	90
Exciting Current With Full load	340
Output Voltage	13.8
Output Current	2.17
Output Voltage Without Load	14.5
HI-POT :	
Test Time	1
PRI TO SEC	1250
PRI TO CORE	1250
SEC TO CORE	1250
Efficiency	70
Insulation Class	B (130)

MECHANICAL SPECIFICATION

Dimensions (L*W*H)	84*64.5*55.5
Weight	620
Environment:	
Operating Temperature	-10 To 40
Storage Temperature	-20 To 70
Relative Temperature	40°C±2°C
RELATIVE HUMIDITY	450

ELECTRICAL CIRCUIT

