

SPECIFICATION

1U 300W
ATX PFC
Ultra Small Footprint (80x185 mm)
Power Supply

Model: P6300P 1FN

Specification subject to change without prior notice.



3261 Keller Street
Santa Clara, CA 95054
Ph: 408-980-9813
Fx: 408-980-8626
E-mail: info@topmicro.com

***This specification describes 1U 300W ultra small footprint industrial grade switching power supply with active power factor correction.**

1. Input Characteristics:

- 1.1 Input Voltage Range -- 90~264Vac, full range with active power factor 90% min
- 1.2 Input Frequency Range -- 47Hz to 63Hz.
- 1.3 Input AC Current (Max) -- 6.0A max, full load.
- 1.4 Inrush Current -- At 132Vac / 264Vac, full load condition, no damage occur, input fuse shall not blow.
- 1.5 Efficiency -- 63% min, at nominal line input full load.
- 1.6 Input Leakage Current -- Leakage current from line to ground will be less 3.5mA rms, measurement will be made at 240Vac/60Hz.

2. Output Characteristics:

2.1 Static Output Characteristics.

	Output Voltage		Load Range		Regulation		Ripple Max	Ripple & Noise
	Min.	Max.	Min.	Max.	Min.	Max.	mV P-P	Max. mV P-P
1.	+3.3 V		0.3 A	18.0 A	- 5 %	+ 5 %	50 mV	100 mV
2.	+5.0 V		2.0 A	30.0 A	- 5 %	+ 5 %	50 mV	100 mV
3.	+12.0 V		0.5 A	16.0 A	- 5 %	+ 5 %	100 mV	150 mV
4.	-12.0 V		0.0 A	1.0 A	- 10 %	+ 10 %	150 mV	200 mV
5.	+5.0 Vsb		0.0 A	2.0 A	- 5 %	+ 5 %	100 mV	100 mV

Note:

- 1. Noise Test -- Noise bandwidth is from Dc to 20MHz.
- 2. Ripple frequencies greater than 1 MHz shall be attenuated by the measurement system.
- 3. Add 0.1uF / 10uF capacitor at output connector terminals for ripple & noise measurements.
- 4. Combined total current from +3.3V and +5V rails shall not exceed 32A.
- 5. The total output power shall not exceed 300W.

2.2 Dynamic Output Characteristics:

- 2.2.1 Initial Delay Time -- NONE.
- 2.2.2 Rise Time -- 50 mS max, at nominal line full load.
- 2.2.3 Turn-on Delay Time -- 600mS max, at nominal line full load.
- 2.2.4 Hold-up Time -- 16mS min. for + 5V output at nominal line full load.
- 2.2.5 Transient Overshoot -- 10% max. of delay state after load change of 25% within the range of 50% to 100% of full load.
- 2.2.6 Temperature Coefficient ----- 0.03% per °C max.

3. Protections:

- 3.1 Over Voltage Protection --- Standard on +3.3V output set at 3.7Vdc – 4.5Vdc.
+5.0V output set at 5.7Vdc – 6.5Vdc.
+12.0V output set at 13.5Vdc – 14.5Vdc.
- 3.2 Short Circuit Protection --- A short circuit placed between DC return and output shall cause no damage and the power supply shall shutdown.
- 3.3 Over Power Protection --- The power supply can use electronic circuit to limit the output. Power against excessing +120% - 170% of full load, or protected against excessive power delivery due to short circuit of any output or over total power.
- 3.4 No Load Operation ----- No parts damaged on power supply.

4. Dielectric Withstand Voltage:

- 4.1 Primary to Secondary ----- 1500Vac for 1 minute. Or 2200Vdc for 3 sec.
- 4.2 Primary to Safety Ground --- 1500Vac for 1 minute. Or 2200Vdc for 3 seconds
- 4.3 Insulation Resistance ----- Primary for safety ground - 500Vdc, 100M ohms min.

5. Conducted EMI: Internal Filter Can Meet

- 5.1 FCC Requirement -- Part15, SUB-Part J, Computing Devices “ Class A “ Limits.
- 5.2 VDE Requirement -- Class “ A “ (General Operating Permit) Requirements Of VFG 234/1991.
- 5.3 CISPR Requirement --- Class “ A “ Requirements Of CLSPR 22.
- 5.4 Harmonic Requirement ---IEC10000-3-2 & IEC10000-3-3 Class “ D “.

6. Product Safety: This Power Supply Is Designed Can Meet The Following Specifications

- 6.1 UL/CUL ----- UL60950
- 6.2 TUV ----- EN 60950

7. Environment:


- 7.1 Operation Temperature ----- Air temperature 0 °C to 50 °C.
- 7.2 Operation Relative Humidity ----- 20% to 90%.
- 7.3 Storage Temperature ----- Air temperature -20 °C to 60 °C.
- 7.4 Storage Relative Humidity ----- 5% to 95%.
- 7.5 Altitude ----- Operate properly at any altitude between 0 To 100,000 feet, storage 40,000 feet.
- 7.6 Vibration ----- 0.38mm. 5-55-5Hz, 1 minutes per cycle; 30 minutes for each axis (X,Y,Z).

8. Burn-In

8.1 Burn-In ----- At 45 °C, max. load, 4 hours.

9. Mean Time Between Failure ----- 100 KHrs minimum at 75% load for 25 °C ambient temperature.

10. Power-Good Signal:

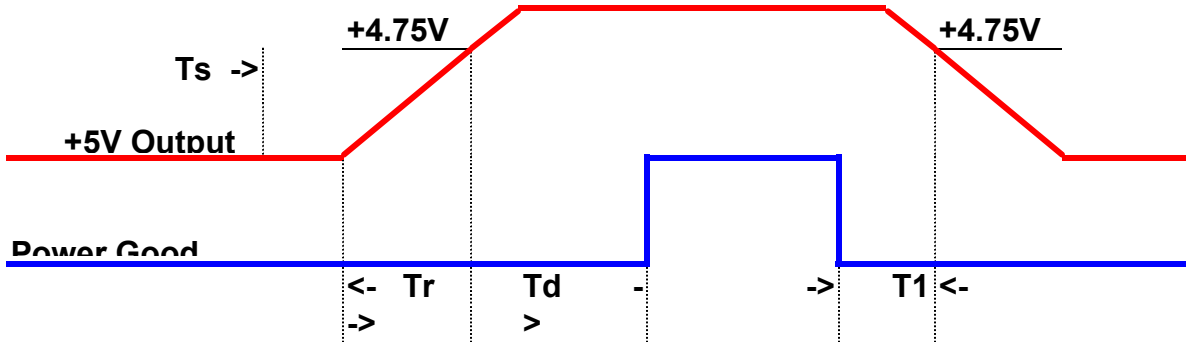

Note: $T_r \leq 100$ ms, $T_1 \geq 1$ ms, $T_d = 100 - 500$ ms.

11. Dimension

11.1 W x H x D ----- 80.0 x 40.0 x 185.0 (mm)

