

18W EU Type 5-18VDC Output

Features

- Efficiency Level VI
- TUV/GS, CE Approved
- Overcurrent Protection
- Short Circuit Protection
- Input Protection
- RoHS Compliant



General

- Insulation Resistance
- Primary to Secondary 50Mohm Min.
- Efficiency Level VI
- Standby Power 0.1W Max.
- Leakage Current 0.25mA Max.

Environmental

- Operating Temperature 10°C~40°C
- Cooling Convection
- Temperature Coefficient 0.05%/°C
- Humidity 5~95%RH(non-condensing)
- Storage Temperature -20°C~+80°C

Mechanical

- Dimensions 71*43*29mm

Model Selection

Part Number	Output Voltage	Output Current	Ripple & Noise	Efficiency
W060025YY-EU	6V	2500mA	90mv	VI
W120015YY-EU	12V	1500mA	120mv	VI
W180010YY-EU	18V	1000mA	150mv	VI

Input

- Input Voltage 90~264VAC
- Input Frequency 47~63Hz
- Input Current 1.2A Max.
- Inrush Current 40A Max.

Output

- Output Voltage Range 5~18V
- Output Current Range 100~2500mA
- Output Power Range 0~18W
- Short Circuit Protection Automatic Recovery
- Over-Current Protection Automatic Recovery
- Ripple and Noise 240mVp-p Max.
- Turn OnTime 20-30mS Nom.
- Line Regulation 1% Max.
- Output Regulation ±5%


Print Name

Signature

Company

Date

Mechanical Drawing

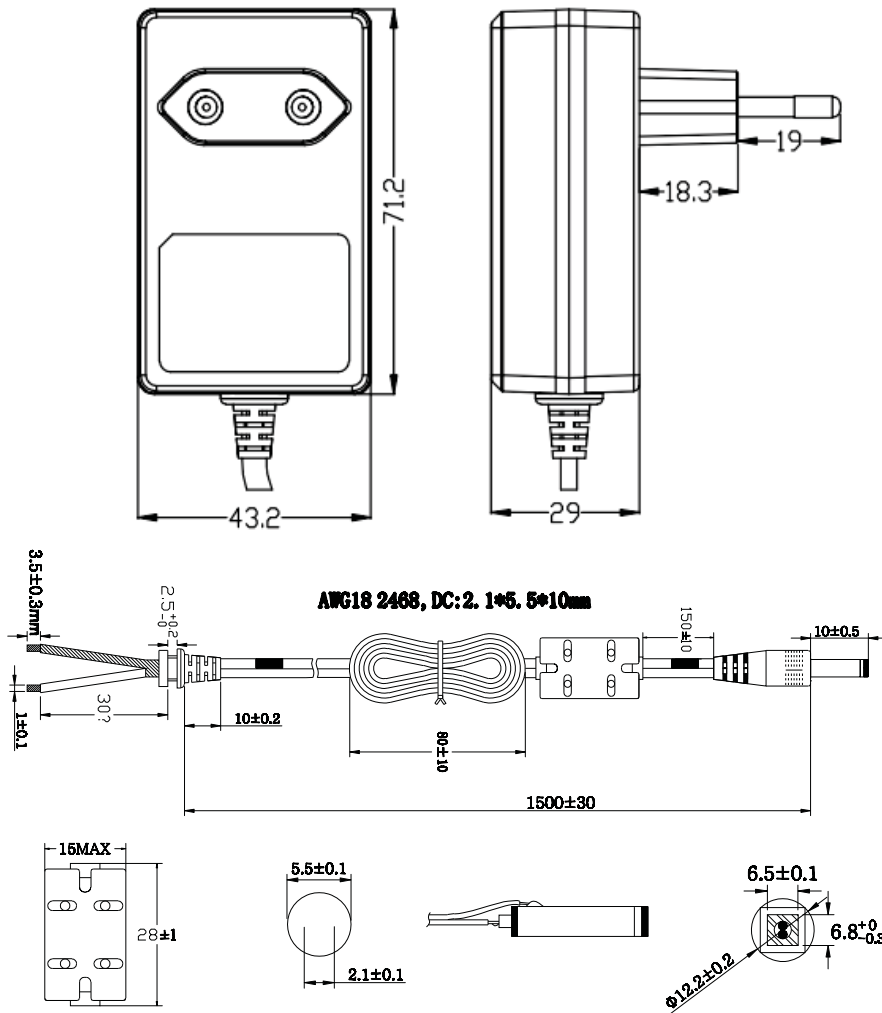

Packing



Master Carton:
510x390x220mm
12.5KG/carton
90pcs/Carton



Inner White Box