

# SPECIFICATION

## High Quality Desktop Adapter 90-264VAC Input +6VDC 3A Output

**P/N: A060030SU1 RS**

\*\*\* Specification Approval \*\*\*

This specification (total 11 pages including drawings) is approved in entirety by:

---

Company Name

Print Name

Signature

Date

Specification subject to change without prior notice.



3261 Keller St.  
Santa Clara, CA 95054  
Tel: 408-980-9813  
E-mail: [infor@topmicro.com](mailto:infor@topmicro.com)  
[www.topmicro.com](http://www.topmicro.com)

## Contents

- 1 Input Requirements
- 2 Output Requirements
- 3 Protection
- 4 PLD
- 5 COOLING
- 6 EMC
- 7 Leakage Current
- 8 Safety Approval
- 9 Hi-Pot
- 10 Environment
- 11 Vibration
- 12 Mechanical
- 13 DC output connector type and pin assignment
- 14 Label specification
- 15 Package

## 1.0 Input requirements

### 1.1 Input voltage range

Type	Low range	High range
Nominal	115Vac	230Vac
Minimum	90Vac	185Vac
Maximum	132Vac	264Vac
Frequency	47-63Hz sine wave 1 $\phi$	47-63 Hz sine wave 1 $\phi$

Auto range - switch at approximately 150Vac $\pm$ 5Vac

Universal range - 90~264Vac

Range - Selectable by jumper connector or wire.

Range - Selectable by switch.

### 1.2 Input Current

1.0A rms max	At AC low line input and DC output full load
--------------	--

### 1.3 Input protection

1.6A Fuse	The power supply shall be protected against power line surges and any abnormal condition.
-----------	---

### 1.4 Input surge current

40A/60A max	At power supply cold start, ambient temperature 25°C @115Vac /230Vac nominal AC input.
-------------	--

**1.5 Efficiency**

72.0%	Minimum average efficiency in active mode
-------	---

**1.6 Hold up time**

10ms min	At AC nominal input@ output full load (1 half cycle)
----------	---

**1.7 Power consumption**

0.5W rms max	At AC nominal input@output min load
--------------	-------------------------------------

**2.0 Output requirements**

**2.1 Turn on delay**

5000 ms max	At AC low line input@output full load
-------------	---------------------------------------

\* Test on delay is measured from 0 voltage output to the main output regulation.

**2.2 DC output regulation**

Voltage	Loading(A)			Tolerance Range	Adjustable voltage	Range
	Min	Normal	Max	Total Regulation		
+6V	0.05		3.0A	±5%	none	

\* Total regulation involved line regulation load regulation cross regulation---etc

\* Line regulation is measured from 90Vac to 132Vac or 185vac to 264vac

\* Load regulation is measured all output from min load to max load at 115vac  
or 230vac nominal AC input voltage.

### 2.3 Ripple/noise \*

Voltage	Low frequency*1	High frequency*2	*3	*4
(DC)	Ripple mv(p-p)	Ripple mv(p-p)	Noise mv(p-p)	Ripple/Noise(p-p)
+6V	—	—	—	60mV

\* The ripple is measured from peak to peak with band width limit of 20MHZ

(By passed at the end of connector with 10uf electrolytic and 0.1uf ceramic disk capacitor under DC output full Load, AC nominal input 25°C ambient temperature).

\* 1.2.3.4 Unless has special requirements otherwise \*4 is the testing spec.

### 2.4 Output transient response (dv , tmax)

0.6v dv max	At AC nominal input loading from 50% load to max load or peak load.
16ms t max	Dynamic rise time 10uS max , duty 40mS max , Dynamic load step is slew rate of 0.5A/uS

\* Test only for main output or designed by customer.

### 2.5 Power output limit : Peak20 W

### 2.6 Burn in test : Will be defined after meeting.

### 2.7 Led display : none

### 3.0 Protection

#### 3.1 Short protection / Over current protection

The power supply will self-protect any output to ground, And auto recovery when abnormal circuit faults remove.

An output short circuit is defined as any output impedance of less than 0.1 ohms.

Short current and over current can not exceed 8A max after 1 min. at nominal line input.

Voltage	OCP Current(A)	Power in(W)	OCP method		
			latch off	Current limit	Fold back
+6V	3.5~7.0		□	□	☒
			□	□	□
			□	□	□
			□	□	□
			□	□	□

#### 3.2 Over voltage protection

Voltage	OVP range	OVP Method		
		Latch Off	Auto recovery	Voltage limit
+6V	9 MAX	□	□	☒
		□	□	□
		□	□	□
		□	□	□
		□	□	□

**3.3 No load protection**

The power supply is provided with no-load operation to prevent the power supply and system from damage.

**3.5 Temperature coefficient: Less than  $\pm 0.5\%$ /  $^{\circ}\text{C}$**

**4.0 PLD (power line disturbance )**

**4.1 LINE POWER SURGE**

The power supply shall meet its specification with a rise in AC voltage to 120% of maximum rated line voltage (288 voltage for 100-240 Vac operation) for a maximum of 20 milliseconds at 50Hz and 16 millisecond at 60Hz. The surge is to be applied five times with an interval of one minute between surges.

**4.2 LINE VOLTAGE SAG**

The power supply shall continue to meet its specifications with a line voltage drop (and subsequent return to minimum rated voltage) to 68 Vac with a total power sag cycle time of 20 ms (rise and fall time shall equal 10 ms each).

**5.0 COOLING**

Cooling Method	
By ___ mm fan force air cooling	<input type="checkbox"/>
By natural air.	<input checked="" type="checkbox"/>

## 6.0 EMC

Meet EN55022 class B, Fcc part 15 Sub part B class B.

### 6.1 CE spec.

- EN55022 Limits and methods of measurement of radio disturbance characteristics of information technology equipment.
- EN61000-3-2 By household appliances and similar electrical equipment “Harmonics”.
- EN61000-3-3 By household appliances and similar electrical equipment “Voltage fluctuations”.
- EN55024(1998)+A1(2001) By EMS TEST:
- ESD Measurement(EN61000-4-2).
- RF Field strength Susceptibility Measurement(EN61000-4-3).
- Electrical Fast Transient/Burst Measurement(EN61000-4-4).
- Surge Immunity Test(EN61000-4-5).
- Conducted Disturbances Induced By Radio-Frequency Field Immunity Test (CS) (EN61000-4-6).
- Power Frequency Magnetic Field Immunity Tests (EN61000-4-8).
- Voltage Dips, Short interruptions and Voltage Variation immunity tests (EN61000-4-11).

**7.0 Leakage current : 0.25 mA max.**

### 8.0 Safety approval

A : <u>CUL</u>	D : <u>FCC</u>	G : <u>EK-Mark</u>
B : <u>TUV/GS</u>	E : <u>CCC</u>	H : <u>PSE</u>
C : <u>CB</u>	F : <u>C-TICK</u>	I : <u>T-Mark</u>



## 9.0 HI-POT

HI-POT---A IEC 320 3pin primary to secondary ( FG ) 1500Vac 10mA 1min

HI-POT---B IEC 320 2pin primary to secondary 3000Vac 10mA 1min

## 10. Environment

### 10.1 TEMPERATURE AND HUMIDITY

OPERATING TEMPERATURE 0 DEGREES C TO 40 DEGREES C.

OPERATING HUMIDITY 8% TO 90% RH.(RELATIVE HUMIDITY).

STORAGE TEMPERATURE -20 DEGREES C TO 85 DEGREES C.

STORAGE HUMIDITY 5% TO 95% RH.(RELATIVE HUMIDITY).

## 11. Vibration

SWEEP AND RESONANCE SEARCH

FREQUENCY	DURATION	AXIS	AMPLITUDE
5-20-500	30 MINUTES	X,Y,Z	1G


## 12. Mechanical

### 12.1 Dimension unit :


L x W x H = 87.3 X 47.4 x 32 (mm)

### 12.2 Weight ( g ) : 198

### 12.3 Mechanical Drawing

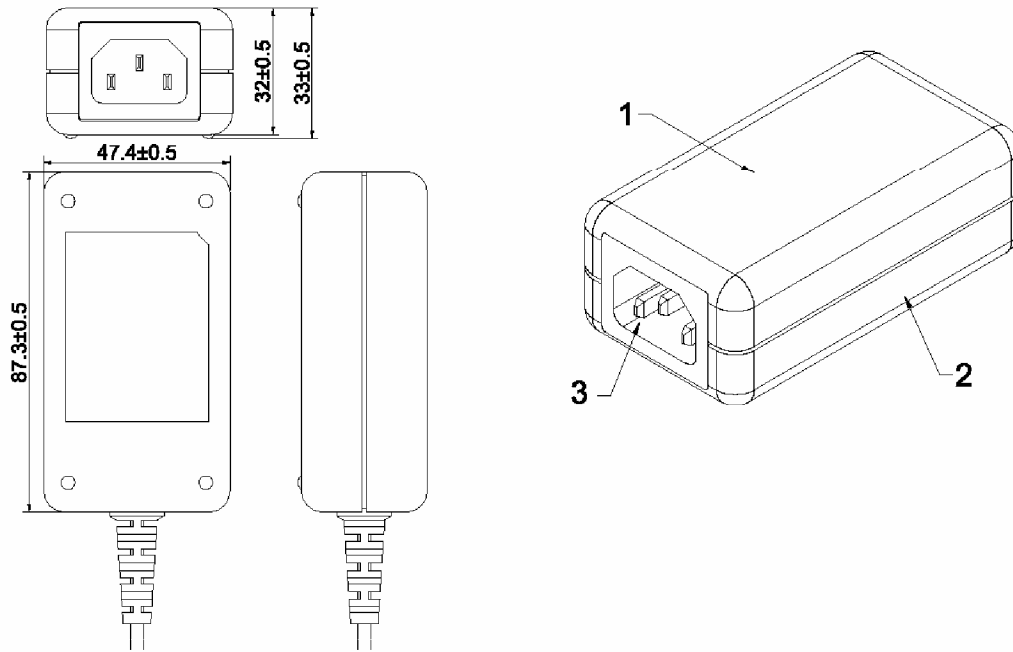

### 13. DC Output Connector Type and Pin Assignment

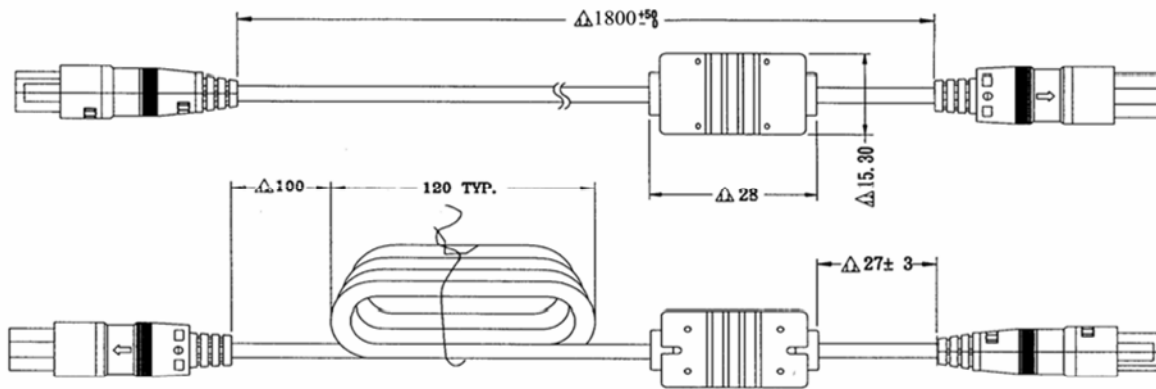

**NOTE:**

1. COLOR: (A), (B) BLACK.

2. CABLE MATERIAL: UL2464 22AWG 300V.(BLACK)

