


P/N: LTD-DE-03-12D EU

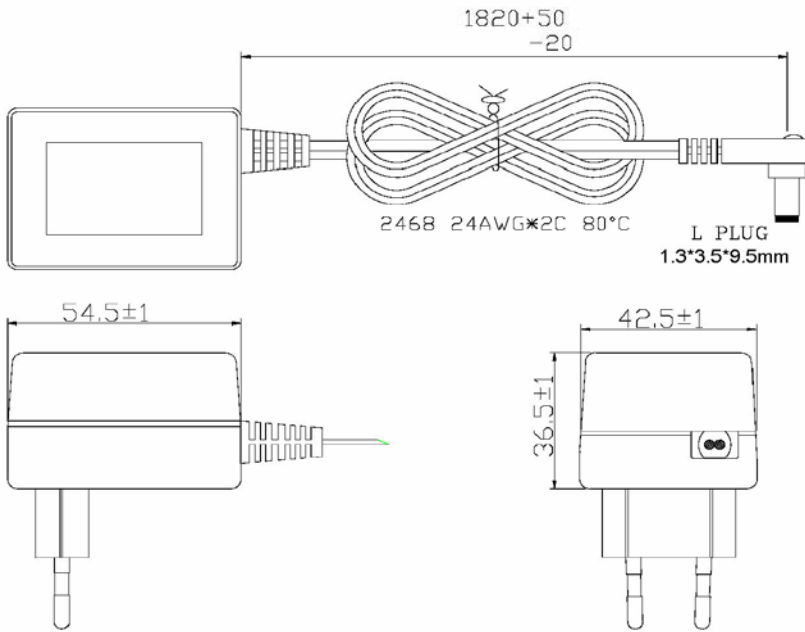

Output Cable: **2468 24AWG/2C 80 °C 1.8M LENGTH**

ELECTRONICAL SPECIFICATION

Input Voltage	230~240	Volts
Frequency (Hz)	50	Hz
Power Rated (W)	10	W
Exciting Current With No load	40	mA Max
Exciting Current With Full load	80	mA Max
Output Voltage (DC)	12.0	Volts±5%
Output Current	250	mA
Output Voltage Without Load	18.0	Volts±5%

HI-POT :

Test Time	1	Min
PRI TO SEC	3750	Volts
PRI TO CORE	3750	Volts
SEC TO CORE	1250	Volts
Insulation Class	B (130)	°C

MECHANICAL SPECIFICATION

Dimensions (L*W*H)	54.5*42.5*36.5	mm
Weight	200	g
Environment:		
Operating Temperature	-10 To 40	°C
Storage Temperature	-20 To 70	°C
Relative Temperature	40 ±2	°C
RELATIVE HUMIDITY	90% RH	

ELECTRICAL CIRCUIT

