

# SPECIFICATION

## High Quality 80 Plus Gold Switching Power Supply

**500W ATX Output  
Universal AC Input  
Extended PS/2: 150Wx160Lx86H mm  
(14 CM Top Mounted Fan)**

**P/N: P5500C 8G**

**\*\* Specification Approval\*\***

This specification (total 10 pages including cover page) is approved in it's entirety by:

---

Company Name

Print Name

Signature

Date



3261 Keller St.  
Santa Clara CA 95054  
Tel: 1-408-980-9813  
Fax: 1-408-980-8626  
Email: [infor@topmicro.com](mailto:infor@topmicro.com)  
Web: [www.topmicro.com](http://www.topmicro.com)

- 1.0 INPUT:.....3**
  - 1.1 VOLTAGE.....3
  - 1.2 FREQUENCY.....3
  - 1.3 CURRENT.....3
  - 1.4 INRUSH CURRENT.....3
  - 1.5 POWER EFFICIENCY.....3
  - 1.6 LEAKAGE CURRENT.....3
  - 1.7 POWER FACTOR..... 3
  
- 2.0 OUTPUT:.....3**
  - 2.1 REMOTE ON/OFF.....4
  - 2.2 HOLD-UP TIME.....4
  - 2.3 POWER GOOD DELAY.....4
  - 2.4 POWER FAIL DELAY.....4
  - 2.5 TURN-ON DELAY TIME.....5
  - 2.6 TRANSIENT OVERSHOOT.....5
  - 2.7 RISE TIME.....5
  
- 3.0 PROTECTION:.....5**
  - 3.1 OVER POWER PROTECTION.....5
  - 3.2 OVER CURRENT PROTECTION.....5
  - 3.3 OVER VOLTAGE PROTECTION.....6
  - 3.4 UNDER POWER PROTECTION.....6
  - 3.5 SHORT PROTECTION.....6
  
- 4.0 ENVIRONMENT:.....6**
  - 4.1 OPERATING TEMP .....6
  - 4.2 STORAGE TEMP.....6

4.3 OPERATING HUMIDITY .....6  
4.4 STORAGE HUMIDITY..... 6  
4.5 OPERATING ALTITUDE .....6  
4.6 STORAGE ALTITUDE..... 6

**5.0 HI-POT:.....6**  
5.1 PRIMARY TO SECONDARY..... 6  
5.2 INSULATION RESISTANCE.....6

**6.0 CE REQUIREMENTS: .....7**  
6.1 CONDUCTED EMI.....7  
6.2 SAFETY STANDARDS .....7

**7.0 DIMENSIONS.....7**

**1.0 INPUT:**

**1.1 VOLTAGE**

MINIMUM	NOMINAL	MAXIMUM	UNITS
90	100~240	264	Vrms

**1.2 FREQUENCY**

47Hz ~ 63Hz

**1.3 CURRENT**

115Vac / 6A max. 230Vac / 3A max.

**1.4 INRUSH CURRENT**

No damage.

**1.5 POWER EFFICIENCY**

MEET 80 Plus(Gold) at 115Vac input .

**1.6 LEAKAGE CURRENT**

3.5mA max.

**1.7 POWER FACTOR**

PF > 0.9

**2.0 OUTPUT:**

Voltage	+5V	+3.3V	+12V	-12V	+5Vsb
Max load	25.0A	25.0A	40.0A	0.8A	3.0A
Min load	0.1A	0.1 A	0.1A	0.0A	0.0A
Peak load	--	--	--	--	3.5A
3 Regulation	+/- 3%	+/- 3%	+/- 3%	+/- 10%	+/- 5%
Ripple & Noise	50mV	50mV	120mV	120mV	50mV

The continuous total output power is 500W max.

The combined power of +5V and +3.3V is 130W max.

Peak currents may last up to 12 seconds with not more than one occurrence per minute.

Add 0.1uF and 10uF capacitors across output terminal during ripple & noise test.

3 LOAD REGULATION TEST TABLE :

	+5V	+3.3V	+12V	-12V	+5Vsb
LOAD1	0.1A	0.1A	0.1A	0.0A	0.0A
*LOAD2	2.47A	2.47A	6.3A	0.13A	0.47A
*LOAD3	6.17A	6.17A	15.76A	0.32A	1.18A
*LOAD4	12.34A	12.34A	31.52A	0.63A	2.36A
LOAD5	25A	4.5A	28A	0.8A	3A
LOAD6	11.5A	25A	28A	0.8A	3A
LOAD7	0.1A	0.1A	40A	0.8A	1.9A

“\*” 80 Plus faction of load

**2.1 REMOTE ON/OFF**

TTL High/PS-OFF; TTL Low/PS-ON

$V_L=0.8V_{max}$ ,  $I_{IL}=-1.6mA_{max}$  @ $V_{in}=0.4V$

$V_{IH}=2.0V_{min}$  @ $I_{in}=-200uA$ ,  $V_{IH}=5.25V_{max}$  @open ckt.

**2.2 HOLD-UP TIME**

18msec (minimum) at 80% of full load at 230Vac input.

**2.3 POWER GOOD DELAY**

100-500 msec.

**2.4 POWER FAIL DELAY**

>1 msec.

**2.5 TURN-ON DELAY TIME**

2000 msec max. At nominal line full load.

**2.6 TRANSIENT OVERSHOOT**

+/- 10% max with 20% load change on all outputs are 50% of the rated.

Load slew rated 0.5A/uS and capacitive load as below :

+5V	+3.3V	+12V	-12V	+5Vsb
1000uF	1000uF	2200uF	350uF	350uF

## **2.7 RISE TIME**

20ms max at full load.

## **3.0 PROTECTION:**

When OCP, OPP,OVP,UVP or short protection is triggered, the main outputs will be latched off. The main outputs can be reset by cycling the DC remote on/off or AC power. +5Vsb output is auto recovery when fault condition removed.

### **3.1 OVER CURRENT PROTECTION**

+12V output 60Amax.

+5V output 48Amax.

+3.3V output 48Amax.

### **3.2 OVER POWER PROTECTION**

Protection at 110%~150% full load.

### **3.3 OVER VOLTAGE PROTECTION**

+3.3V output 4.5 Vmax.

+5.0V output 7.0 Vmax.

+12.0V output 15.6 Vmax.

### **3.4 UNDER VOLTAGE PROTECTION**

+3.3V output 2.0~2.4 V.

+5.0V output 3.3~3.7 V.

+12.0V output 8.5~9.5 V.

### **3.5 SHORT PROTECTION**

All output to GND.

## 4.0 ENVIRONMENT:

<b>4.1 OPERATING TEMP.</b>	0 °C to +50 °C
<b>4.2 STORAGE TEMP.</b>	-20 °C to +70 °C
<b>4.3 OPERATING HUMIDITY</b>	20% to 90%,non-condensing
<b>4.4 STORAGE HUMIDITY</b>	5% to 95%, non-condensing
<b>4.5 OPERATING ALTITUDE</b>	0 to 10,000 feet
<b>4.6 STORAGE ALTITUDE</b>	0 to 50,000 feet

## 5.0 HI-POT:(Input/Output isolation)

### 5.1 PRIMARY TO SECONDARY

3535Vdc for 3 seconds

### 5.2 INSULATION RESISTANCE

Primary to earth ground 500Vdc , 50M ohms Min.

## 6.0 CE REQUIREMENTS

### 6.1 CONDUCTED EMI

1. MEET FCC: Class B
2. MEET CISPR 22: Class B
3. MEET BSMI: Class B

### 6.2 SAFETY STANDARDS

1. MEET CUL (UL 60950)
2. MEET TUV EN60950
3. MEET CB (IEC 60950 )
4. MEET CE
5. MEET CCC



### **6.3 HARMONIC**

MEET IEC1000-3-2,Class D

### **7.0 DIMENSIONS**

Y=V WxLxH=150x160x86mm **140mm FAN x1 ON TOP**




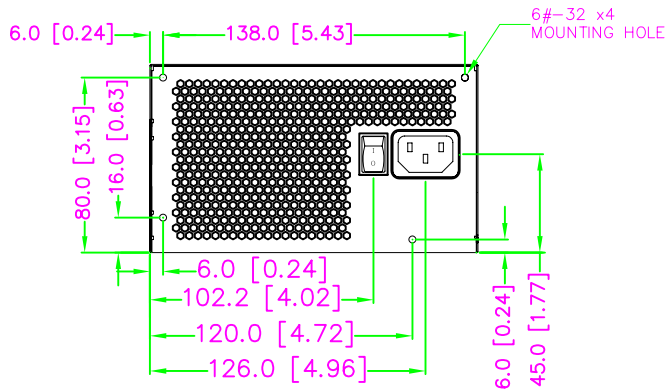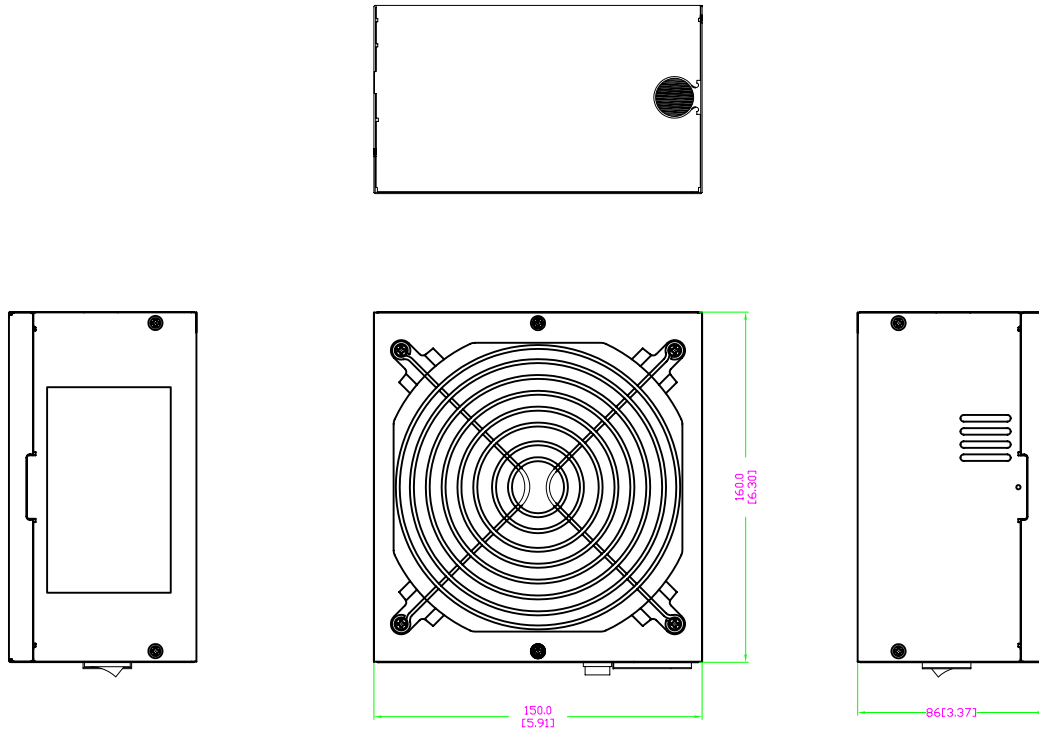

NOTE:

1. CASE TOP: G20-TCEPC09-M100
2. CASE BOT: G20-BCEPC42-M100
3. 材質: SECC(環保鋼) T=0.8mm  
烤漆CWT-033

Top Microsystems Corp.,		APPROVED ZY.CHEN	DRAWING NO.	UNIT MM	REV. 0.1
TITLE P5500C 8G	DATE MAY 07.2009	MODEL NO. P5500C 8G	TOLERANCES: .X = ±0.2 .XX = ±0.15	SHEET 1/1	

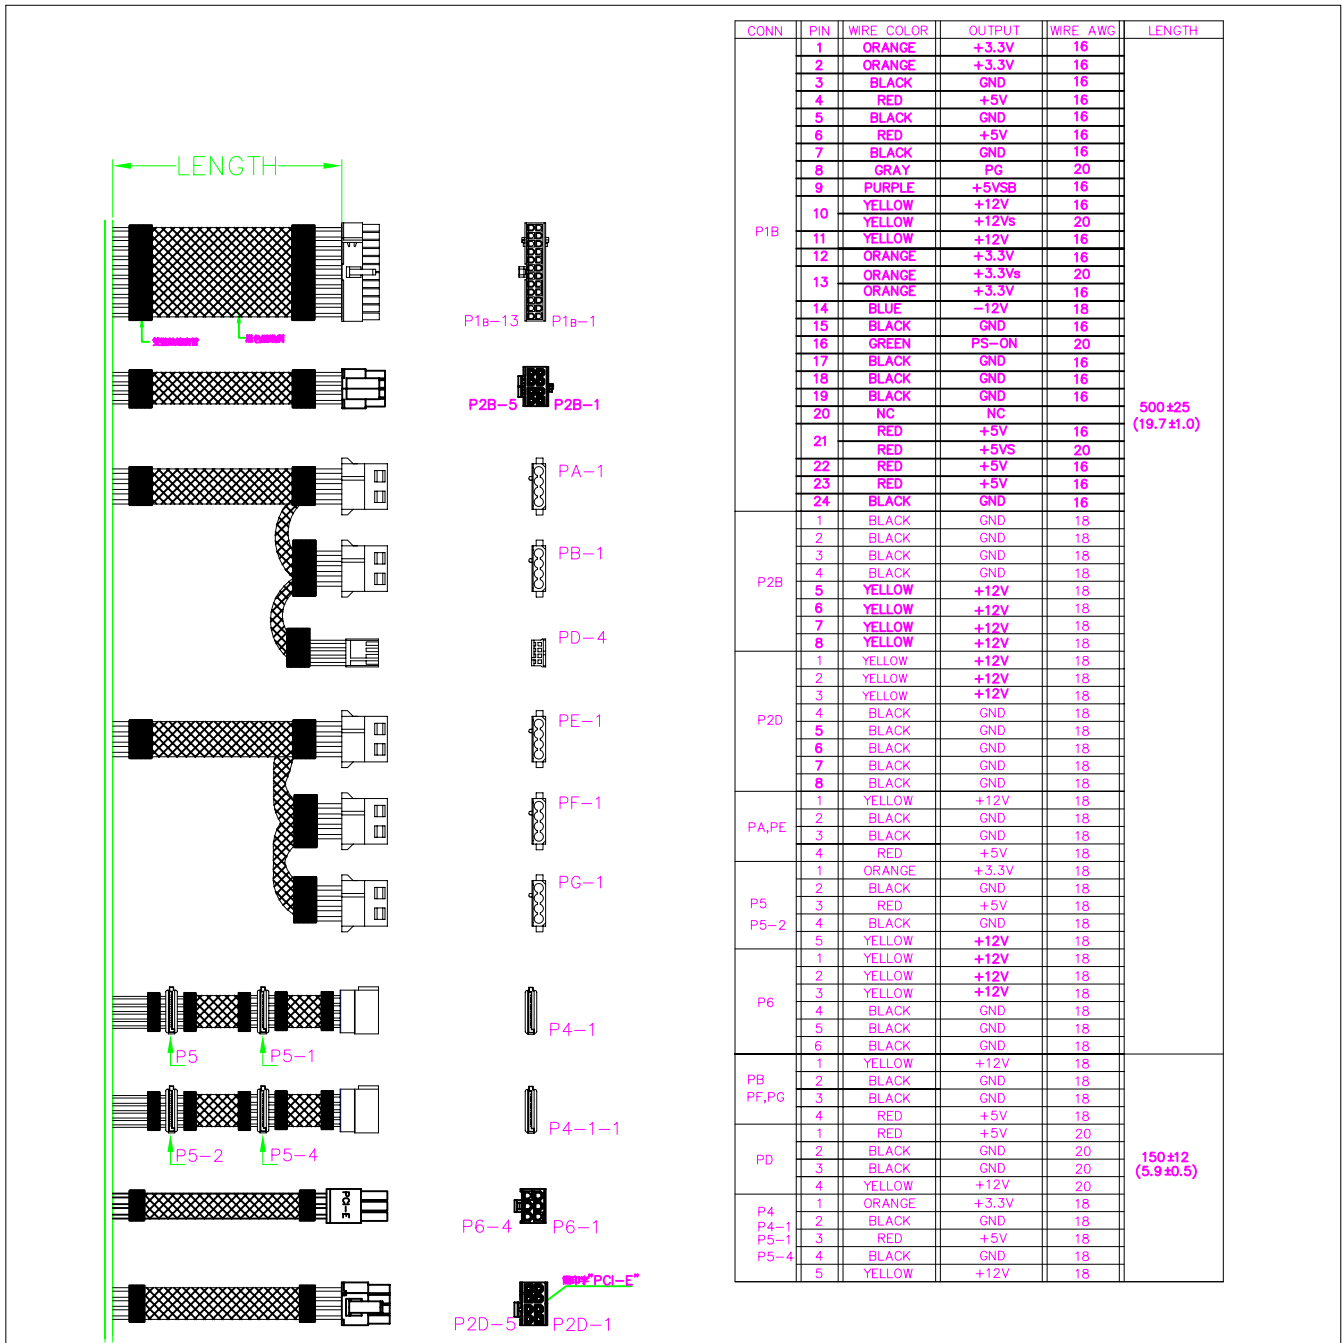

CONN	PIN	WIRE COLOR	OUTPUT	WIRE AWG	LENGTH	
P1B	1	ORANGE	+3.3V	16	500±25 (19.7±1.0)	
	2	ORANGE	+3.3V	16		
	3	BLACK	GND	16		
	4	RED	+5V	16		
	5	BLACK	GND	16		
	6	RED	+5V	16		
	7	BLACK	GND	16		
	8	GRAY	PG	20		
	9	PURPLE	+5VSB	16		
	10	YELLOW	+12V	16		
	11	YELLOW	+12Vs	20		
	12	ORANGE	+3.3V	16		
	13	ORANGE	+3.3Ve	20		
	14	ORANGE	+3.3V	16		
	15	BLUE	-12V	18		
	16	BLACK	GND	16		
	17	GREEN	PS-ON	20		
	18	BLACK	GND	16		
	19	BLACK	GND	16		
	20	NC	NC			
	21	RED	+5V	16		
	22	RED	+5Vs	20		
	23	RED	+5V	16		
	24	RED	+5V	16		
P2B	1	BLACK	GND	18		
	2	BLACK	GND	18		
	3	BLACK	GND	18		
	4	BLACK	GND	18		
	5	YELLOW	+12V	18		
	6	YELLOW	+12V	18		
	7	YELLOW	+12V	18		
	8	YELLOW	+12V	18		
P2D	1	YELLOW	+12V	18		
	2	YELLOW	+12V	18		
	3	YELLOW	+12V	18		
	4	BLACK	GND	18		
	5	BLACK	GND	18		
	6	BLACK	GND	18		
	7	BLACK	GND	18		
	8	BLACK	GND	18		
PA,PE	1	YELLOW	+12V	18		
	2	BLACK	GND	18		
	3	BLACK	GND	18		
	4	RED	+5V	18		
P5	1	ORANGE	+3.3V	18		
	2	BLACK	GND	18		
	3	RED	+5V	18		
	4	BLACK	GND	18		
P5-2	5	YELLOW	+12V	18		
	1	YELLOW	+12V	18		
	2	YELLOW	+12V	18		
	3	YELLOW	+12V	18		
	4	BLACK	GND	18		
	5	BLACK	GND	18		
P6	1	YELLOW	+12V	18		
	2	BLACK	GND	18		
	3	BLACK	GND	18		
	4	BLACK	GND	18		
	5	BLACK	GND	18		
	6	BLACK	GND	18		
PB	1	YELLOW	+12V	18		
	2	BLACK	GND	18		
	3	BLACK	GND	18		
	4	RED	+5V	18		
PF,PG	1	RED	+5V	20		
	2	BLACK	GND	20		
	3	BLACK	GND	20		
	4	YELLOW	+12V	20		
PD	1	ORANGE	+3.3V	18		
	2	BLACK	GND	18		
	3	RED	+5V	18		
	4	BLACK	GND	18		
P4	1	ORANGE	+3.3V	18		
	2	BLACK	GND	18		
	3	RED	+5V	18		
	4	BLACK	GND	18		
P4-1	1	ORANGE	+3.3V	18		
	2	BLACK	GND	18		
	3	RED	+5V	18		
	4	BLACK	GND	18		
P5-1	1	ORANGE	+3.3V	18		
	2	BLACK	GND	18		
	3	RED	+5V	18		
	4	BLACK	GND	18		
P5-4	1	ORANGE	+3.3V	18		
	2	BLACK	GND	18		
	3	RED	+5V	18		
	4	BLACK	GND	18		
P6-1	1	ORANGE	+3.3V	18		
	2	BLACK	GND	18		
	3	RED	+5V	18		
	4	BLACK	GND	18		
P2D-1	1	YELLOW	+12V	18		
	2	BLACK	GND	18		
	3	BLACK	GND	18		
	4	YELLOW	+12V	18		

PART NO: G18-AT23570-M4XX(G18-AT23570-P4xx)  
 G18-AS23570-M4XX(G18-AS23570-P4xx)  
 G18-AI23570-MC00(G18-AI23570-PC02)  
 G18-AI23570-M8XX(G18-AI23570-P8XX)  
 G18-AD23570-M600(G18-AD23570-P602) \*2EA  
 G18-AA23570-M5XX(G18-AA23570-P5XX)  
 G18-AS23570-M700(G18-AS23570-P702)

NOTE:

P1B	HOUSING: WST P4/P20-I42002K7	OR EQU
	TERMINAL: WST I42002PS-2	
P2B	HOUSING: W.H P4-I42002K3A	OR EQU
	TERMINAL: W.H P4-I42002K4A	
PA,PB	HOUSING: AMP 1-480424-0	OR EQU
PE,PF,PG	TERMINAL: AMP 60619-4	
	HOUSING: AMP 171822-4	OR EQU
PD	TERMINAL: AMP 170262-2	
P4	HOUSING: WST:P5-I12701(編織式)	OR EQU
P4-1	TERMINAL: WST:I12701PS-00	
p5	HOUSING: WST P5-112702	OR EQU
P5-1~4	TERMINAL: WST 112702PL	
P6	HOUSING: MOLEX 5559-002	OR EQU
	TERMINAL: MOLEX 39-00-0060	
P2D	HOUSING: P6-I42002K19	
	TERMINAL: MOLEX 39-00-0060	

<p>Top Microsystems Corp.,</p> <p>TITLE P5500C 8G</p>	<p>APPROVED ZY.CHEN</p> <p>DATE MAY 07, 2009</p>	<p>DRAWING NO. P5500C 8G</p> <p>MODEL NO. P5500C 8G</p>	<p>UNIT MM (INCHES) 0.1</p> <p>TOLERANCES: .X= ±0.2 .XX= ±0.15</p>	<p>REV. 0.1</p> <p>SHEET 1/1</p>
---	--	---	--	----------------------------------