

SPECIFICATION

Model: P6461E 1F EPS

**1U Power Supply
460 Watts, 7 Output ATX**

With Active PFC

Revision A

Specification subject to change without a prior notice
(unless we have an agreement with you on file.)



3261 Keller Street
Santa Clara, CA 95054
Tel: 408-980-9813
Fax: 408-980-8626

Table of Content

1.0 General	4
1.1 Parameter Specifications	4
2.0 Input Characteristics	4
2.1 Input Voltage	4
2.2 Input Waveform	4
2.3 Input Frequency	4
2.4 Input Current	4
2.5 Power Factor Correction	4
2.6 In-Rush Current	5
2.7 Line Regulation	5
2.8 Input Leakage Current	5
2.9 Isolation (Hi-Pot)	5
3.0 Output Characteristics	6
3.1 DC Output Characteristics	6
3.2 Remote Sensing	6
3.3 Overshoot	6
3.4 Efficiency	6
4.0 Time Sequence	7
4.1 Hold-Up Time	7
4.2 Power Good Signal	7
4.3 Output Rise Time	8
4.4 Start-Up Time	8
4.5 Dynamic Load Response Time	9
5.0 Protection	10
5.1 Over Current Protection	10
5.2 Over Voltage Protection	10
5.3 Short Circuit Protection	10
5.4 No Load Operation	10
5.5 +5VSB(Standby)	10
5.6 PS-ON (Remote ON/OFF)	11
6.0 System Interface Signal	11
Power Fault Signal	11
7.0 Physical Characteristics	12
7.1 Size	12
7.2 Mounting Requirements	12

7.3 Weight 12

7.4 Cooling 12

8.0 Connectors 12

8.1 AC Input 12

8.2 DC Output Wire Harness List 12

9.0 Environmental 13

9.1 Temperature 13

9.2 Relative Humidity 14

9.3 Altitude 14

9.4 Shock 14

9.5 Power Line Transient 14

9.6 Acoustic Noise 15

10.0 Regulatory Agency Certification 15

10.1 RFI/EMI Standards 15

10.2 Safety Standards 15

11.0 Reliability 15

11.1 Mean Time Between Failures (MTBF) 15

1.0 General

This specification describes the physical, functional and electrical characteristics of a 1U 460 watts ATX12V EPS industrial grade switching power supply with active Power Factor Correction capabilities.

1.1 Parameter Specifications

Unless specified otherwise, all parameters must be met over the limits of Temperature, load and input voltage.

2.0 Input Characteristics

2.1 Input Voltage

100 to 240 VAC, $\pm 10\%$

2.2 Input Waveform

The unit is capable of operating with a 10% distorted sine wave input as measured by a distortion analyzer. Its flattopping clipped 10% from the peak value of standard sine wave.

2.3 Input Frequency

47 Hz to 63 Hz

2.4 Input Current

8-4 Amps

2.5 Power Factor Correction

The Power Supply shall incorporate universal power input with active power factor correction, which shall reduce line harmonic current in accordance with the EN61000-3-2 and JETI MITI standards.

2.5.1 Power Factor Correction

PF ≥ 0.95 at 50% of rated load and nominal input voltage

2.5.2 Harmonic Distortion

Meet the EN61000-3-2 standards

2.6 In-Rush Current**CONDITION****LIMITS**

AC Inrush current shall not exceed 50 Amps peak for one-quarter of AC cycle. 25°C Air Ambient cold star

No damage shall occur or over stressed input fuse shall not blow

2.7 Line Regulation**CONDITIONS****LIMITS**

Full load, 100-240 VAC

±10%

2.8 Input Leakage Current

Input leakage current from line to ground will be less than 3.5 mA rms. Measurement will be made at 240 VAC and 60Hz.

2.9 Isolation (Hi-pot)

1500Vrms, 50Hz for one (1) minute between each input AC line and the grounding conductor.

3000Vrms, 50Hz for one (1) Minute between the input AC lines and secondary low voltage outputs and shields.

All isolation transformers will have been tested prior to assembly into a power supply unit. Any such transformers without a grounded shield will be tested to 3750 Vrms.

3.0 Output Characteristics

3.1 DC Output Characteristics (Total 460W max.)

To be met under all combinations of loading:

Output # Voltage	+5V	+3.3V	+12V1	+12V2	-5V	-12V	+5VSB
Max. Load	30A	30A	15A	15A	0.3A	0.8A	2A
Min. Load	1A	1A	1A	1A	0A	0A	0A
Load Reg.	±5 %	±3 %	±5 %	±5 %	±10 %	±10 %	±5%
Cross Reg.	±5 %	±3 %	±5 %	±5 %	±10 %	±10 %	±5%
Line Reg.	1%	1%	1%	1%	2%	2%	1%
Ripple	1%	1%	1%	1%	2%	2%	1%
Noise	1%	1%	1%	1%	2%	2%	1%

Note 1: The +5 & +3.3 Volt total output shall not be exceed 220 Watts.

Note 2: The +5, +12 & +3.3 Volt total output shall not be exceed 433 Watts.

Note 3: Total output shall not exceed 460Watts max.

3.2 Remote Sensing

The +3.3V, +5V, +12V outputs should have provision for remote sensing to compensate for 200mV of cable, connector, and PCB trace drops.

3.3 Overshoot

Any output overshoot at TURN-ON shall not exceed 10% of nominal voltage value.

3.4 Efficiency

70% minimum at full load and nominal AC input.

4.0 Time Sequence

4.1 Hold-Up Time

Unit shall continue to supply regulated DC outputs and power good signal for at least 16 milliseconds at 115/230 VAC full load after a loss of AC input voltage, which shall be represented by a short circuit at the AC input.

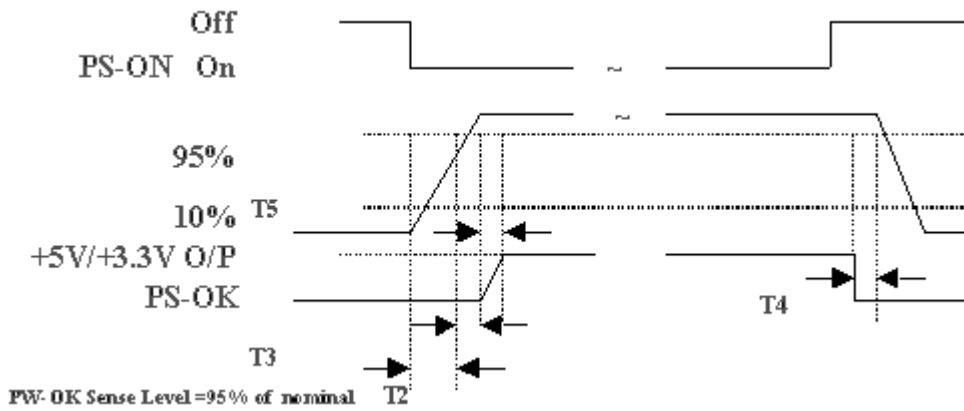


Figure 1

Note:

T2: The output voltage shall rise from <10% of nominal to within the regulation specified in Section 2.2 within 0.1 to 20 ms.(0.1ms ≤T2 ≤20ms)

T3、T4 and T5 are as following Table:

Signal Type:	+5VDC,TTL compatible
Logic level low	<0.4V while sinking 4 mA
Logic level high	Between 2.4VDC and 5VDC output while sourcing 200μA
High state output impedance	1KΩ from output to common
PS-OK delay	100ms < T3 < 500 ms
PS-OK rise time	T5 ≤ 10 ms
Power down warning	T4 > 1 ms

Table 1.

4.2 Power Good Signal

When the power supply is turned off for a minimum of 1.0 second and turned on, the power-good signal as described below will be generated.

The power supply shall provide a power-good signal to indicate proper operation of the power supply. This signal shall be a TTL compatible high level for normal operation; low level for fault conditions.

Power-good shall go to a low level at least 1 ms before the +5V output voltage falls below the regulation limits described in 3.1 DC output Characteristics. The operation point used as a reference for measuring the 1ms shall be minimum line voltage and maximum load.

All waveform transitions shall be smooth and monotony, i.e. no oscillations.

The power-good signal shall stay low (during POWER-ON) until all output voltages are stable within regulation limits. The power-good signal shall have a TURN-ON delay greater than 100 ms but less than 500 ms.

4.2.1 Fanout

Power Good output circuit shall consist of an active pull down component and a passive pull up resistor.

Power Good output voltage to be met under recommended loading conditions.

CONDITIONS

$I_{OH}=200\mu\text{A}$ Min.

$I_{OL}=4\text{mA}$ Min.

LIMITS


$V_{OH}=2.7\text{V}$ Min.

$V_{OL}=0.4\text{V}$ Max.

4.3 Output Rise Time

The +5 Volt and +3.3 Volt output shall have a turn-on rise time of less than 100 ms under all load conditions. Rise time is measured between +5V: 0.5V/4.5V; +3.3V:

0.33V/2.97V

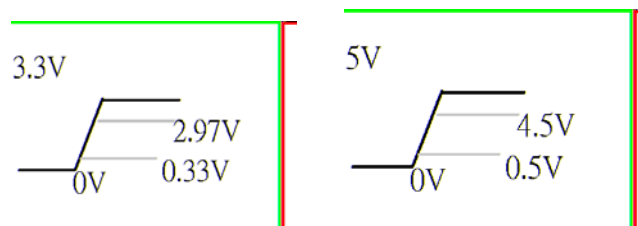

The +5 V and +3.3V output shall not vary from a smooth curve by more than 0.5 VP-P during turn-on and turn-off.

4.4 Start-up timing

All outputs shall be stable and in regulation in less than 2.0 second under all load and line conditions. Start-up time is measured between the AC turn-on and 4.75 volts on +5V output. See Figure 1.

4.5 Dynamic Load Response Time

Transient response is measured by switching the output load from 70 to 100 to 70 percent of its full value at a frequency of 100 Hz and 50% duty cycle, step load change is 0.5A/us, The magnitude V_r is less than +/- 5% of +5V, +3.3V and +12V outputs, the recovery time T_r is less than 1ms.

5.0 Protection

5.1 Over Current Protection

This power supply shut down all DC outputs when the outputs are overloaded to the limit. The power supply shall into the off state and recovery by toggling the PSON signal or by an AC power interruption.

The +5VSB outputs will be internally current limited.

Over Current Limits:

Voltage	Minimum	Maximum	Shutdown Mode
+3.3V	110%	150%	Latch Off
+5V	110%	150%	Latch Off
+12V	110%	150%	Latch Off

5.2 Over Voltage Protection

The power supply shall shutdown and latch off after an over voltage condition occurs. This latch shall be cleared by toggling the PSON signal or by an AC power interruption.

Over Voltage Limits:

Voltage	Minimum	Maximum	Shutdown Mode
+3.3V	3.9V	4.5V	Latch Off
+5V	5.7V	6.5V	Latch Off
+12V	13.3V	14.5V	Latch Off

5.3 Short Circuit Protection

A short circuit placed on +5V, +3.3V, +12V shall cause no damage to this unit. The power supply shall shutdown and latch off if the short circuit shown. This latch shall be cleared by toggling the PSON signal or by an AC power interruption.

5.4 No Load Operation

When the primary power is applied, with no load on any output voltage, no damage or hazardous conditions shall occur. In such a case, the power supply shall power up and stabilize.

5.5 +5VSB (Standby)

The +5VSB output is always on (+5V Standby) when AC power is applied and power switch is turned on. The +5VSB line is capable of delivering at a maximum of 2.0A for PC board circuit to operate.

5.6 PS-ON (Remote ON/OFF)

PS-ON is an active low signal that turns on all of the main power rails including +3.3V, +5V, +12V & -12V power rails. When this signal is held by the PC board or left open circuited, outputs of the power rails should not deliver current and should be held at a zero potential with respect to ground. Power should only be delivered to the rails if PS-ON signal is held at ground potential. This signal should be held at +5VDC by a pull-up resistor internal to the power supply.

Power Status	PS-ON signal
ON	L
OFF	H

6.0 Indicator Function

Power Fault Signal

Power Supply shall give fault signal (TTL compatible signal) that will indicate the status of the power supply operation.

This signal detects the following conditions:

nGood Low Power Supply Fault	$V_{ol} \leq 0.4V$ (a) $I_{ol} \leq 20mA$
nGood High Power Supply Normal	$V_{oh} \geq 3.5V$ (a) $I_{oh} \leq 250uA$

7.0 Physical Characteristics

7.1 Size

W x H x D: 106 x 40 x 300 mm, see attachment.

7.2 Mounting Requirements

See attachment

7.3 Weight

See attachment

7.4 Cooling

Airflow from the power supply should be in exhaust direction and shall be rated at 10 cfm minimum.

8.0 Connections

8.1 AC Input Connector

IEC 320 AC Inlet with EMI Filter, 10A/250V

8.2 DC Output Wire Harness List

8.2.1 Connector P1:

24 PIN (For ATX motherboard) (Optional)

Connector: Molex 39-01-2200 18AWG

Wire Color	Signal	Pin	Pin	Signal	Wire Color
Orange	+3.3VDC	13	1	+3.3VDC	Orange
Blue	-12VDC	14	2	+3.3VDC	Orange
Black	COM	15	3	COM	Black
Green	PS-ON	16	4	+5VDC	Red
Black	COM	17	5	COM	Black
Black	COM	18	6	+5VDC	Red
Black	COM	19	7	COM	Black
White	-5VDC	20	8	PG	Gray
Red	+5VDC	21	9	+5VSB	Purple
Red	+5VDC	22	10	+12VDC	Yellow
Red	+5VDC	23	11	+12VDC	Yellow
Black	COM	24	12	+3.3VDC	Orange

8-Pin Molex 39-01-2080 or Equivalent (For SSI motherboard.)

PIN	SIGNAL	18AWG	PIN	SIGNAL	18AWG
1	Com	Black	5	+12 V1	Yellow
2	Com	Black	6	+12 V1	Yellow
3	Com	Black	7	+12 V1	Yellow
4	Com	Black	8	+12 V1	Yellow

+12V Power connector (for ATX12V Configurations Only)**Connector: Molex 39-01-2040 or equivalent**

Pin	Signal	Wire Color
1	COM	Black
2	COM	Black
3	+12V	Yellow
4	+12V	Yellow

Peripheral Connector(s)(For Hard Drive.)**Connector: AMP 1-480424-0 or Molex 8981-04P or approved equivalent.**

Pin	Signal	18AWG Wire
1	+12VDC	Yellow
2	COM	Black
3	COM	Black
4	+5VDC	Red

P11(For Floppy Disk or Control Board)**Connector: AMP 171822-4 or approved equivalent.**

Pin	Signal	18AWG Wire
1	+5VDC	Red
2	COM	Black
3	COM	Black
4	+12VDC	Yellow

9.0 Environmental**9.1 Temperature****9.1.1 Operating**

0 to 40 °C

9.1.2 Non-Operating

-4.0 to 140 °F (-20 to 60°C)

9.2 Relative Humidity

9.2.1 Operating

20 to 90 % non-condensing at 104°F (40 °C)

9.2.2 Non-Operating

5 to 95 % non-condensing at 122°F (50°C).

9.3 Altitude

9.3.1 Operating

Sea level to 10,000 feet

9.3.2 Non-Operating

Sea level to 40,000 feet

9.4 Shock

9.4.1 Operating

The power supply shall exhibit no signs of damage or degradation of performance when subjected to a shock of 5g's for 11 ms, with a 1/2 sine wave for each of the perpendicular axes X, Y and Z.

9.4.2 Non-Operating

The power supply shall exhibit no signs of damage or degradation of performance when subjected to a shock of 30g's for 11 ms, with a 1/2 sine wave for each of the perpendicular axes X, Y and Z.

at a constant acceleration of 2.0g for a duration of one (1) hour for each of the perpendicular axes X, Y and Z.

The power supply shall not incur physical damage or degradation of any characteristics below the performance specifications.

9.5 Power Line Transient

Drop Out

With a full cycle input voltage drop-out at 50Hz, the unit shall operating within the prescribed voltages with a drop-out cycle repetition rate of 500ms.

CONDITIONS

Full load, Nom. Input AC Voltage

LIMITS

Meet all requirements

9.6 Acoustic Noise

The power supply shall be tested in accordance with the ANSIS12.10-1985 standard specifications. The "A" weighted overall sound pressure level as well as individual octave band levels from 63 Hz to 16,000 Hz is measured with the noise meter placed 1 meter from the nearest vertical surface of center of fan installed in power supply.

CONDITIONS

115 VAC Input, full load of +5V
0.5A of +12V.

LIMITS

Acoustic noise is 40 db maximum

10.0 Regulatory Agency Certification

10.1 RFI/EMI Standards

The power supply, when installed in system, shall comply with the following radiated and conducted emissions standards:

- a) Meet FCC part 15, Subpart B, Class B computing devices.
- b) CISPR22 (EN55022) Class B.

10.2 Safety Standards (pending)

The power supply shall be certified with the following safety standards,

- a) UL, cUL1950 (Information Processing/Business equipment).
- b) CB certification
- c) CE Certificate & Test report.

11.0 Reliability

11.1 Mean Time Between failures (MTBF)

Using MIL217F, Appendix a the calculated MTBF = 100,000 hours at 25°C

12.2 Misc.

Date code indicating week and year of manufacture.

Technical information in this specification is subject to change without notice.

The revision of specification will be marked on the cover.