

Ux300PQ-M 200-300W Series



FEATURES

EN61000-3-2 class A and D compliant
Power Factor 0.98 typical
Overvoltage protection
Short-circuit protection
Power Fail Detect (PFD)
100 % burn-in at full rated load
Remote sense on output #1 and output #2
Remote inhibit – TTL high disables output
Compliant with RoHS requirements

INPUT SPECIFICATIONS

Input voltage : 90-264 VAC
Input frequency: 47-63 Hz
Input current : 4.7A (rms) for 115 VAC
2.3A (rms) for 230 VAC
Earth leakage current: 100 uA max. @ 115 VAC, 60 Hz
220 uA max. @ 230 VAC, 50 Hz

OUTPUT SPECIFICATIONS

Output voltage/current : See rating chart
Total output power : See rating chart
Ripple and Noise : 2% peak to peak maximum
Overvoltage protection : Provided on output #1 only;
set at 115-140 % of its nominal output voltage
Overcurrent protection : All outputs protected to short circuit conditions
Temperature coefficient : All outputs $\pm 0.04\%$ / $^{\circ}\text{C}$ maximum
Transient response : Maximum excursion of 4 % or better on all models, recovering to 1 % of final value within 500us after a 25 % step load change
PFD signal : TTL logic high for normal operation and TTL logic low upon loss of input power. This signal appears at least 1ms prior to master output dropping 5 % below its nominal value. This signal also provides a minimum delay of 100ms after master output is within regulation.
Remote inhibit : Requires an external TTL high level signal to inhibit outputs for standard models.

OPERATING SPECIFICATIONS

Operating temperature : 0 $^{\circ}\text{C}$ to +70 $^{\circ}\text{C}$
Storage temperature : -40 $^{\circ}\text{C}$ to +85 $^{\circ}\text{C}$
Relative humidity : 5% to 95 % non-condensing
Derating : Derate from 100 % at +50 $^{\circ}\text{C}$ linearly to 50 % at +70 $^{\circ}\text{C}$
Cooling : 200/250/300 watts continuous output power at 35 CFM forced air cooling or 100/125/150 watts at convection cooling

GENERAL SPECIFICATIONS

Switching frequency : 70 KHz ± 10 KHz
Power factor : 0.98 typical
Efficiency : 70 % minimum on all models
Hold-up time : 12 msec minimum at 110 VAC
Line regulation : $\pm 0.2\%$ maximum at full load
Inrush current : 30A @ 115 VAC or 60A @ 230 VAC, at 25 $^{\circ}\text{C}$ cold start
Withstand voltage : 4000 VAC from input to output
1500 VAC from input to ground
500 VAC from output to ground
MTBF : 300,000 hours minimum at full load at 25 $^{\circ}\text{C}$ ambient, calculated per MIL-HDBK-217F
EMC Performance (EN60601-1-2: 2001)
EN55011: Class B conducted, Class B radiate d
EN61000-3-2: Harmonic distortion, Class A and D
EN61000-3-3: Line flicker
EN61000-4-2: ESD, ± 8 KV air and ± 6 KV contact
EN61000-4-3: Radiated immunity, 3 V/m
EN61000-4-4: Fast transient/burst, ± 2 KV
EN61000-4-5: Surge, ± 1 KV diff., ± 2 KV com.
EN61000-4-6: Conducted immunity, 3 Vrms
EN61000-4-8: Magnetic field immunity, 3 A/m
EN61000-4-11: Voltage dips, 30% reduction for 500 ms, 60% reduction for 100 ms and >95% reduction for 10 ms

SAFETY APPROVALS


UL60601-1, CSA C22.2 No. 601.1
UL 60950-1
TÜV EN60601-1

OUTPUT VOLTAGE/CURRENT RATINGS

Model	Output # 1				Output # 2				Output # 3				Output # 4				Output Power
	Vnom.	Imin.	I _{max.}	Tol.	Vnom.	Imin.	I _{max.}	Tol.	Vnom.	Imin.	I _{max.}	Tol.	Vnom.	Imin.	I _{max.}	Tol.	
U1200PQ-M33	3.3V	3.0 A	60 A	3%													200 W
U1300PQ-M05	5.1V	3.0 A	60 A	2%													300 W
U1300PQ-M12	12V	1.2 A	25 A	2%													300 W
U1300PQ-M15	15V	1.0 A	20 A	2%													300 W
U1300PQ-M24	24V	0.6 A	12.5 A	2%													300 W
U1300PQ-M30	30V	0.5 A	10 A	2%													300 W
U1300PQ-M48	48V	0.5 A	6.3 A	2%													300 W
U4250PQ-M03051212	3.3V	3.0 A	35 A	3%	5.1 V	2.0 A	22 A	2%	12 V	0 A	4 A	4%	12 V	0 A	4 A	4%	250 W
U4300PQ-M05121205	5.1V	2.0 A	35 A	2%	12 V	1.0 A	10 A	2%	12 V	0 A	4 A	4%	5.1 V	0 A	4 A	4%	300 W
U4300PQ-M05151524	5.1V	2.0 A	35 A	2%	15 V	0.8 A	8 A	2%	15 V	0 A	4 A	4%	24 V	0 A	2.5 A	4%	300 W
U4300PQ-M05121212	5.1V	2.0 A	35 A	2%	12 V	1.0 A	10 A	2%	12 V	0 A	4 A	4%	12 V	0 A	4 A	4%	300 W
U4300PQ-M05121224	5.1V	2.0 A	35 A	2%	12 V	1.0 A	10 A	2%	12 V	0 A	4 A	4%	24 V	0 A	2.5 A	4%	300 W
U4300PQ-M05121215	5.1V	2.0 A	35 A	2%	12 V	1.0 A	10 A	2%	12 V	0 A	4 A	4%	15 V	0 A	4 A	4%	300 W
U4300PQ-M05241212	5.1V	2.0 A	35 A	2%	24 V	0.5 A	5 A	2%	12 V	0 A	4 A	4%	12 V	0 A	4 A	4%	300 W
U4300PQ-M05240515	5.1V	2.0 A	35 A	2%	24 V	0.5 A	5 A	2%	5.1 V	0 A	4 A	4%	15 V	0 A	4 A	4%	300 W
U4300PQ-M05120524	5.1V	2.0 A	35 A	2%	12 V	1.0 A	10 A	2%	5.1 V	0 A	4 A	4%	24 V	0 A	2.5 A	4%	300 W
U4300PQ-M24120512	24V	0.5 A	6.3 A	2%	12 V	1.0 A	10 A	2%	5.1 V	0 A	4 A	4%	12 V	0 A	4 A	4%	300 W
U4300PQ-M24120524	24V	0.5 A	6.3 A	2%	12 V	1.0 A	10 A	2%	5.1 V	0 A	4 A	4%	24 V	0 A	2.5 A	4%	300 W
U4300PQ-M24121212	24V	0.5 A	6.3 A	2%	12 V	1.0 A	10 A	2%	12 V	0 A	4 A	4%	12 V	0 A	4 A	4%	300 W
U4300PQ-M24240515	24V	0.5 A	6.3 A	2%	24 V	0.5 A	5 A	2%	5.1 V	0 A	4 A	4%	15 V	0 A	4 A	4%	300 W
U4300PQ-M24241212	24V	0.5 A	6.3 A	2%	24 V	0.5 A	5 A	2%	12 V	0 A	4 A	4%	12 V	0 A	4 A	4%	300 W

NOTES:


- Optional enclosed format and fan control
- All outputs are floating. It can be connected externally for positive or negative output.
- Output #1 & #2 can be adjusted within $\pm 5\%$ of their nominal voltage.
- Output #3 & #4 can be adjusted within $\pm 15\%$ of their nominal voltage.
- 300 watts for version with cover-and-fan assembly. 150 watts for version without moving air (maximum current of output #1 & #2 derated to 50%), or 300 watts with 35 CFM forced air provided by user.
- U1200PQ-M33 is rated 200 watts with 35 CFM forced air cooling or 100 watts convection cooled. U4250PQ-M03051212 is rated 250 watts with 35 CFM forced air cooling (maximum current of output #1 & #2 derated to 50%) or 125 watts convection cooled.
- Single output models may be operated at no-load. At no-load, output voltage tolerance increases to 10%.

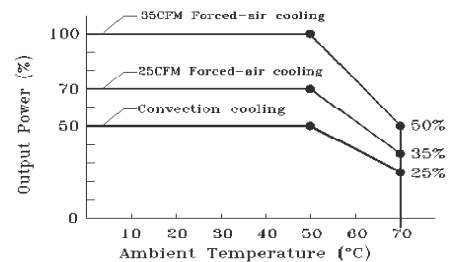

DERATING CURVE

MECHANICAL SPECIFICATIONS

Single Output Models

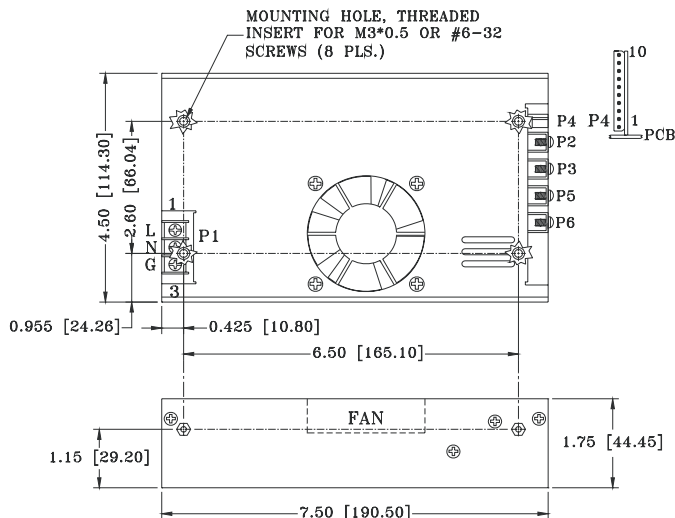


NOTES:

- Dimensions shown in inches [mm]
- Tolerance 0.02 [0.5] maximum
- Input connector P1 is Dinkle DT-35-B01W-03 with M3, nickel-plated screws.
- Connector P4 mates with Molex housing 50-37-5103 and pins 5263.
- Connectors P2, P3, P5 and P6: M3*0.5 screw connections
- Weight: 1.20 Kgs. (2.64 lbs.) approx.
- DC fan on P4 is rated at 12 V / 0.1 A.

MECHANICAL SPECIFICATIONS

Multiple Output Models

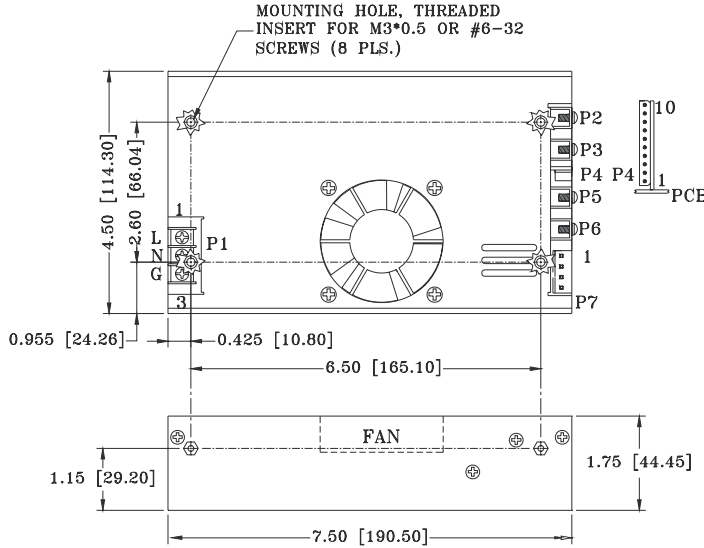

NOTES:

1. Dimensions shown in inches [mm]
2. Tolerance 0.02 [0.5] maximum
3. Input connector P1 is Dinkle DT-35-B01W-03. Screws are M3, nickel plated.
4. Connector P4 mates with Molex housing 50-37-5103 and pins 5263.
5. Connectors P2, P3, P5 and P6: M3*0.5 screw connections
6. Output connector P7 mates with Molex housing 09-50-3041 and Molex 2878 series crimp terminal.
7. Weight: 1.24 Kgs. (2.73 lbs.) approx.
8. DC fan on P4 is rated at 12 V /0.1 A.

PIN CHART

Single Output Models

P1 (AC)			P2	P3	P4			
1	2	3			1	2	3	4
LIVE	NEUTRAL	GROUND	+VO1	+VO1	SIGNAL GROUND (- VO1)	+S (VO1)	-S (VO1)	PFD

P4						P5	P6	P7			
5	6	7	8	9	10			1	2	3	4
INHIBIT	N.C.	N.C.	N.C.	0V (FAN)	FAN	-VO1	-VO1	VOID	VOID	VOID	VOID

Multiple Output Models

P1 (AC)			P2	P3	P4			
1	2	3			1	2	3	4
LIVE	NEUTRAL	GROUND	+VO1	-VO1	SIGNAL GROUND (- VO1)	+S (VO1)	-S (VO1)	PFD

P4						P5	P6	P7			
5	6	7	8	9	10			1	2	3	4
INHIBIT	N.C.	+S (VO2)	-S (VO2)	0V (FAN)	FAN	+VO2	-VO2	+VO3	-VO3	+VO4	-VO4