

SPECIFICATION

High Quality Switching Wallmount Adapter

Universal AC Input
6W 12VDC 0.5A Output



P/N: W120005YY-US

**** Specification Approval****

This specification (total 5 pages including cover page) is approved in it's entirety by:

Company Name

Print Name

Signature

Date



Santa Clara, California 95054 U.S.A

Tel: 1-408-980-9813

Fax: 1-408-980-8626

Email: infor@topmicro.com

Web: www.topmicro.com

1.0 Scope

This specification defines the performance characteristics for a class II single output power supply, Top Microsystems part number W120005YY-US.

2.0 Input

AC Input voltage rating	100Vac to 240Vac
AC Input voltage range	90Vac to 264Vac
AC Input frequency range	47Hz to 63Hz
Max. In-rush current	30A at 100Vac full load 75A at 240Vac full load
Input current	0.3A Max. @ 90Vac 60Hz full load
Standby power	0.3W Max. @ 254Vac 50Hz no load

3.0 Output

Output voltage	+12V
Output voltage tolerance	5%
Min. load current	0mA
Max. load current	500mA
Line regulation	+/-1%
Load regulation	+/-5%
Ripple & Noise	<1%

DC-20MHz/Ripple and Noise is measured on output connector with 20MHz oscilloscope bandwidth differentially with 10uF electrolytic and 0.1uF ceramic capacitors across the output.

4.0 Performance

Total output power	6W typical
Efficiency	70% Min. @ 100~240Vac 50/60Hz full load
Hold up time	10 sec Min. @ 100Vac 60Hz full load
Turn on delay time	3 sec Max. @ 100Vac 60Hz full load
Switching frequency	65KHz typical

5.0 Protection

Over-voltage protection

Over-current protection

Short circuit protection

Over-temperature protection

6.0 Environmental

Operation temperature -20°C to +40°C

Operation humidity 20% to 90% R.H.

Storage temperature -20°C to +75°C

Storage humidity 0% to 90% R.H.


7.0 Safety

Agency approvals

	Country	Standard
UL	USA	UL 60950
FCC	USA	FCC Part 15

8.0 Mechanical

Unit: mm

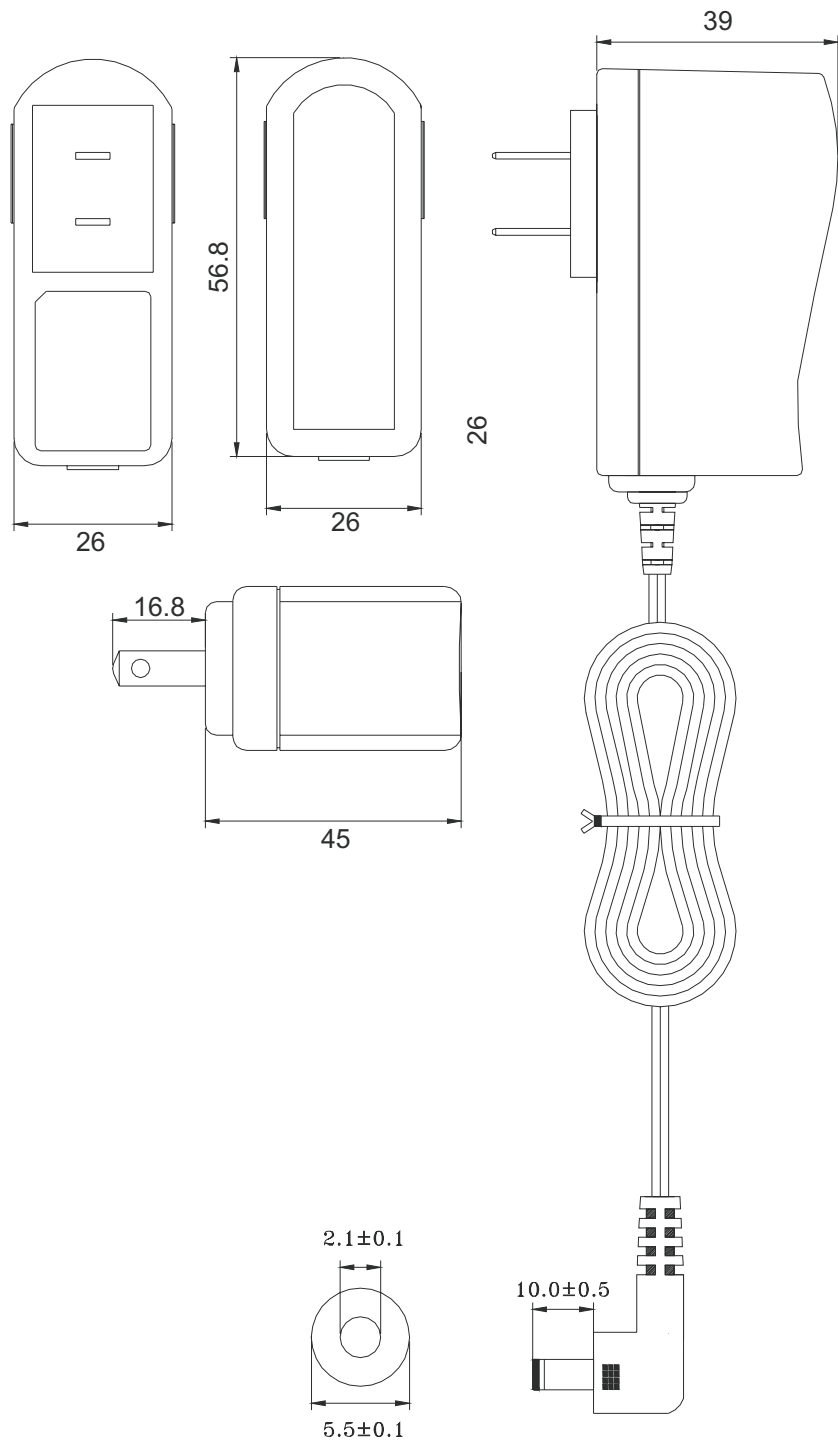

9.0 Label

Unit: mm

